


# HYTORC Electric Pump

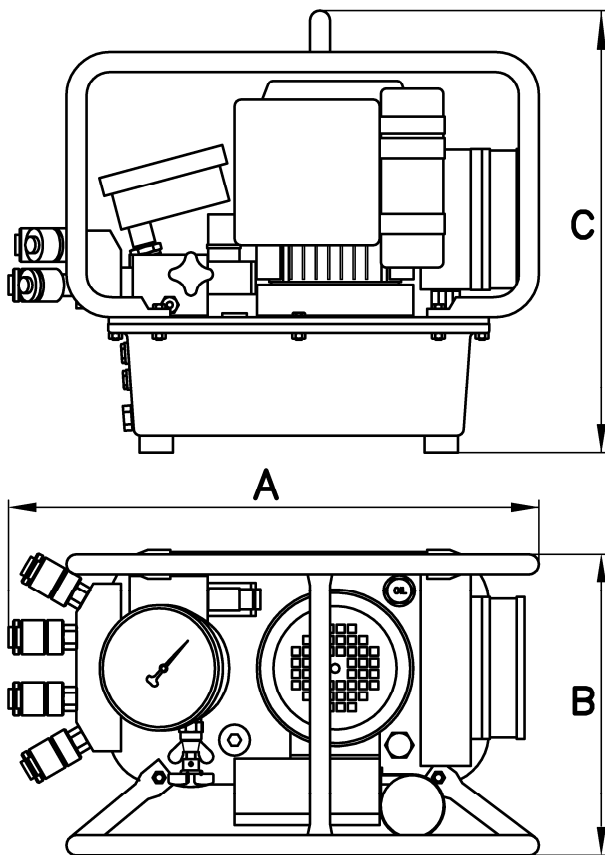

## HYSTREAM 115V HYSTREAM 230V

**3-stage**  
**15 amps at 115V**  
**50-60 Hz**

**Requirement / Spannung :**

115V: 1Ph 100-115V / 50-60Hz

230V: 1Ph 200-230V / 50-60Hz

**Power / Leistung :**

100-115V: 1,2 kW / 1,6 HP – 15 Ampere

200-230V: 1,2 kW / 1,6 HP – 7 Ampere

**Dimensions / Abmessungen:**

A = 18,8" (480 mm)

B = 11,0" (280 mm)

C = 15,7" (400 mm)

**Weight / Gewicht:**

~57 lbs (26 kg) – without oil / ohne Öl

**Specifications / Techn.Daten :**

Max. oil flow / max. Ölstrom:  
up to 1000 psi (bis 70 bar)

	<b><u>50Hz</u></b>	<b><u>60Hz</u></b>
Max. oil flow / max. Ölstrom: up to 1000 psi (bis 70 bar)	510 cu.in/min. (8,0 l/min.)	620 cu.in/min. (10 l/min.)
Middlepressure oil flow / Mitteldruck: up to 4 200 psi (bis 300 bar)	100 cu.in/min. (1,6 l/min.)	120 cu.in/min. (2,0 l/min.)
Highpressure oil flow / Hochdruck: up to 10 000 psi (bis 700 bar)	50 cu.in/min. (0,9 l/min.)	60 cu.in/min. (1,1 l/min.)

Middlepressure oil flow / Mitteldruck:  
up to 4 200 psi (bis 300 bar)

Highpressure oil flow / Hochdruck:  
up to 10 000 psi (bis 700 bar)

**General:**

All pumps are equipped with:

Oilcooler

Gauge psi/bar FS 1.0%

Remote control 24V – 5 m length

4-Tool-Adapter

**Allgemeines:**

Alle Pumpen sind ausgerüstet mit:

Ölkühler

Manometer psi/bar Kl. 1.0

Fernbedienung 24V – 5 m lang

4-Tool-Adapter

**Option:**

Semi-automatic (-A)

Calibrated gauge with certificate

Remote control 24V – 10 m length

Docum.-System (-DOC)

**Option:**

Halb-Automatik (-A)

Kalibriertes Manometer mit Zeugnis

Fernbedienung 24V – 10 m lang

Dokum.-System (-DOC)